


Fujitsu split de perete ON/OFF -ASY9USB



Rank
A

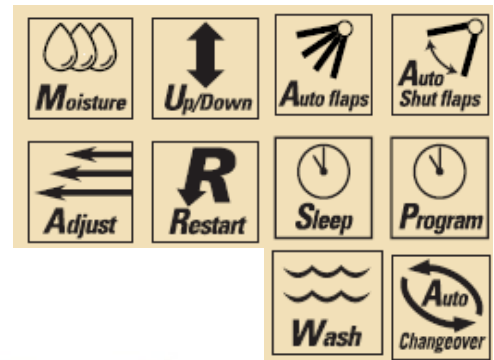

For ASY9UB

ASY9UB

C 2.90kW / 9,900BTU/h

H 3.05kW / 10,400BTU/h

- Compacte, cu un design care economiseste spatiu
- Schimbator de caldura protejat de coroziune
- Compresor clasic ce economiseste energie ,avand un coeficient EER/COP ridicat
- Design imbunatatit al ventilatorului pentru asigurarea unui randament sporit
- Distributie a aerului optimizata in toate coturile camerei datorita configuratiei Supar Vane
- Filtru de praf lavabil
- Functionare in modul silentios
- Functionare silentioasa in modul somn asigurand un confort sporit persoanelor care dorm

Date tehnice:

Model	Unitate interioara		ASY9USB
	Unitate exterioara		AOY9UB
Clasa energetica (incalzire/racire)			A/A
Capacitate	Racire	kw	2,90
	Incalzire		3,05
	Racire	BTU/h	9900
	Incalzire		10400
Eliminarea umiditatii		l/h	1,3
Nivel de zgomot (interior)	Racire/H/M/L/Q	dB(A)	39/35/31/26
Nivel de zgomot (exterior)	Racire		46
Ventilare	Interior	m ³ /h	600
	Exterior		1470
Tensiune de alimentare		V/Ø/Hz	230/1/50
Curent alimentare	Racire	A	3,7
	Incalzire		3,3
Putere consumata	Racire	kw	0,84
	Incalzire		0,75
EER	Racire	W/W	3,45
COP	Incalzire		4,07
Dimensiuni HxWxD	Interior	mm	275x790x215
		kg(lbs)	9(20)
	Exterior	mm	535x695x250
		kg(lbs)	30(66)
Dimensiune teva (micaØ mareØ)		mm	6,35/9,52
Lungime teava max/Diferenta de nivel		m	15/8
Intervalul permis al temperaturii exterioare	Racire	°C	21-43
	Incalzire		-5..+24
Refrigerant			R410A